DATASHEET

63A Double Pole Bidirectional Type A
10kA 30mA 2 Module B Curve RCBO

Product Ref: **63ADP30BAT**

Technical Features:

- Bidirectional
- Compact design allows for easier installation
- Commercial and residential applications such as EV charging units or air source heat pumps
- Two Module device that protects both live and neutral conductors
- Protection device combines the overcurrent function of an MCB with earth fault function of an RCD
- DIN rail mountable
- Incoming cables can be connected either at the top or the bottom
- Test button and trip indicator



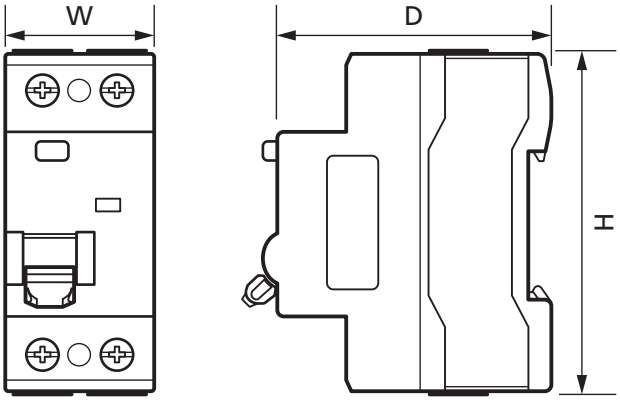

Product Specification

Bidirectional	**Yes**
Voltage Rating	**230V**
Current Rating	**63A**
Weight	**0.259kg**
Incoming Terminal Capacity	**25mm²**
Number of Modules	**2**
Number of Poles	**2P**
Outgoing Terminal Capacity	**25mm²**
Torque Settings	**2Nm**
Short Circuit Rating	**10kA**
Tripping Characteristics	**B Curve**
Tripping Sensitivity	**30mA**
RCD Type	**A**
Mounting	**Din Rail**
Colour	**Grey/Blue**
Material	**Plastic / Metal**
Compliance	**UKCA, CE**
Guarantee	**1 Year**
Standards	**BS EN 61009-1**
Depth	**66mm**
Height	**82.5mm**
Width	**36mm**

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.